



## ■ 概述 Summary

**HG30** 系列熔断器式隔离器，额定电压至交流400 (380) V，额定电流至50A，适用于有高短路电流的配电电路和电动机电路中，作为电源隔离器并作电路过载和短路保护之用。

本系列隔离器由插座、接线端子、熔断体、手柄、外壳和卡板等组成，所有带电部分均装在外壳内，不外露。

*Series HG30 fuse-disconnector with rate voltage up to a.c. 400V, and rated current up to 100A is mainly used in the lighting and motor circuits as the power source isolator and for protection from overload and short-circuits. This series fuse-disconnector is composed of fuse-link and sockets, terminals, handle, and case. All live parts are enclosed in the case.*



## ■ 型号及其含义 Model denomination



极数  
Pole number of the main circuits

额定工作电流  
Rate operating current

约定发热电流  
Conventional thermal current


产品系列型号: HG30  
Fuse-disconnector HG30

## ■ 主要技术指标 Technical data

产品标准	Product standards	GB14048.3 IEC60947-3
约定发热电流	Conventional thermal current(A)	32 50
主电路极数	Number of the main circuits	1、2、3、4
额定工作电压	Rated operating voltage(V)	400(380)
额定工作电流	Rated operating current(A)	32 50
使用类别	Utilization category	AC-20B
额定限制短路电流	Rated limited short-circuit current(kA)	20 (COSΦ0.3)
操作性能(空载操作循环)(次)	Operation performance (without load)( times)	2000
配用圆筒帽型熔断体 Fuse-link with cylindrical caps	符合标准	Standards
	尺 码	Size
	额定电流	Rated current A
	耗散功率 ≤ W	Power dissipation ≤ W
配用电器安装轨	Mounting rail	TH35型, IEC60715 Model TH35, according to IEC60715

■ 外形及安装尺寸 Overall dimensions

HG30-32

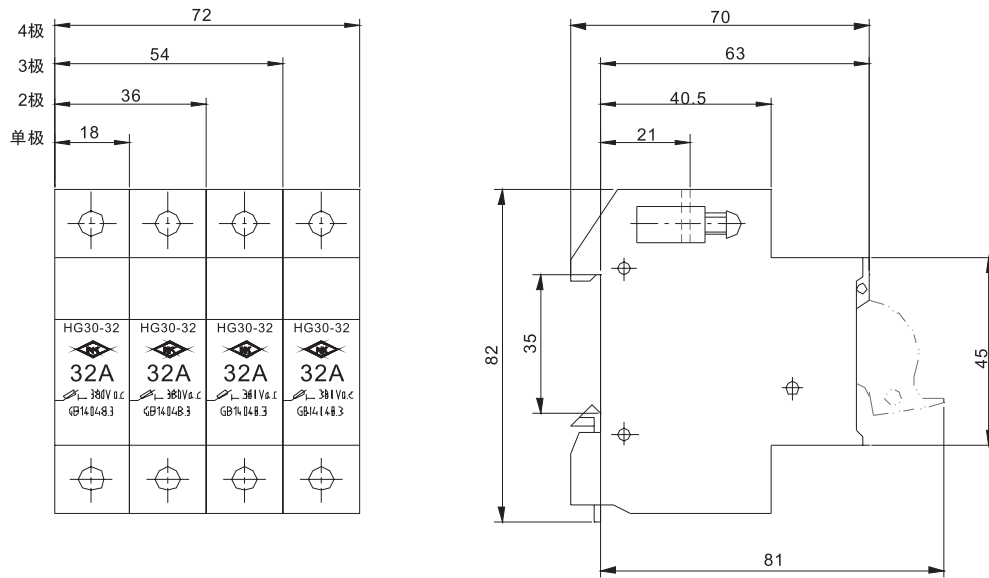

HG30-50

